
Mehrbereichsbohrer DIN 340 HSS-E (Co5) Typ U-TL **kobaltlegiert,** Kreuzanschliff
Multigrade drills DIN 340 HSS-E (Co5) type U-TL **cobalt alloyed,** split point

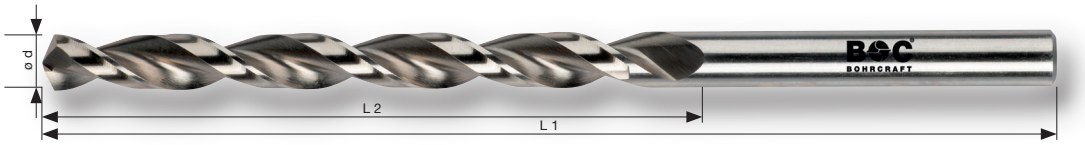

Code **1362**

DIN 340 | HSS-E Co5 | Typ U-TL | VA INOX | TIEFLOCH DEEPHOLE Version | 130° | 1412 C SPLIT POINT | 10xD

Code	P			M	K	N			S
	1.1 – 2.1	3.1 – 4.1	5.1	1.1 – 2.1	1.1 – 4.2	1.1 – 1.6	2.1 – 2.6	4.2	1.1 – 2.6
1362	●	●	●	●	●	●	●	●	

Mehrbereichsbohrer mit parabolisch geformter Spannut zur besseren Spanabfuhr. Für Werkstoffe mit einer Festigkeit bis 1.200 N/mm².
Ideal zum Bohren von mittel-, langspanenden und schwer zerspanbaren Werkstoffen. Deckt in weiten Bereichen Typ N, H und W ab!

Multigrade twist drill with parabolic flute for improved chip removal. Suitable for materials with tensile strength up to 1.200 N/mm² (38 HRC).
Especially suitable for medium, long chipping and hard machinable materials. Covers drill-sectors which should be drilled with Type N, H and W drills!

Ø d mm	L 1 mm	L 2 mm		Artikel-Nr. Part-No.
2,0	85	56	10	1362 03 00200
2,5	95	62	10	1362 03 00250
3,0	100	66	10	1362 03 00300
3,5	112	73	10	1362 03 00350
4,0	119	78	10	1362 03 00400
4,2	119	78	10	1362 03 00420
4,5	126	82	10	1362 03 00450
5,0	132	87	10	1362 03 00500
5,2	132	87	10	1362 03 00520
5,5	139	91	10	1362 03 00550
6,0	139	91	10	1362 03 00600
6,5	148	97	5	1362 03 00650
7,0	156	102	5	1362 03 00700
7,5	156	102	5	1362 03 00750
8,0	165	109	5	1362 03 00800
8,5	165	109	5	1362 03 00850
9,0	175	115	5	1362 03 00900
9,5	175	115	5	1362 03 00950
10,0	184	121	5	1362 03 01000
10,5	184	121	1	1362 03 01050
11,0	195	128	1	1362 03 01100
11,5	195	128	1	1362 03 01150
12,0	205	134	1	1362 03 01200
12,5	205	134	1	1362 03 01250
13,0	205	134	1	1362 03 01300